MM-3RDX-120

120 lb. WLL

CEILING SPEAKER MOUNT WITH 3 AXES OF ADJUSTMENTS

MULTIMOUNT®



The MM-3RDX-120 is an adjustable ceiling speaker mount that provides pan, tilt & roll adjustments. It supports and aims speakers that are equipped with either the 2 X4-1/4 or the 2-3/4" X 5" 4-point mounting pattern.

This model aims speakers from overhead by way of a variety of tube extensions and ceiling attachments. Ceiling speakers achieve up to 360 degrees of horizontal pan angle, up to 180 degrees of tilt angle and 180 degrees of roll adjustment.

Tilt adjustments are made at the side of the speaker adapter plate, Panadjustments are made at the tube extension coupler and the roll feature is adjusted between the mount and the tube extension. The MM-3RDX-18 tube coupler provides a pathway for signal wire and a safety cable to pass through the tube extension to the terminal block. This makes for a clean, safe and predictable method for installing and aiming ceiling speakers.



STANDARD FEATURES:

- Indicators let installers set angles accurately
- Independent pan, tilt & roll aiming
- Improved sound coverage
- Adapts to standard schedule-40 1-1/2" pipe
- Independent No drift, No memory Locking
- Works for speakers with 2-3/4" X 5" and 3-7/16" X 6-7/8"

OPTIONAL ACCESSORIES:

- Ceiling Attachments See Datasheet
- Pipe Extensions See Datasheet

SPECIFICATIONS:

Material: Structural Steel Alloy

Finish: Powder Coat

Tilt Rotation: +/-90 degrees max

Pan Rotation: 360 degrees

Color: Black

WLL: 120 lb. (54.5 Kg) max.

Design Factor: 7:1 ratio Net WGT: 12 lb. (5.45 Kg.) each

Shipping WGT: 14 lb. (6.4 Kg.) each

Pack Count: 1 unit/carton

PACKAGE CONTENTS:


3-axis mount 1pc





ALWAYS INSTALL SAFETY CABLES

MULTIMOUNT®


DIMENSIONS








View Bottom View

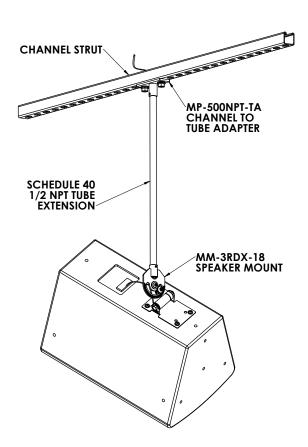



Secure to overhead Structure with 1-1/2" diameter pipe



