

MultiMount[®]

MP-500NPT-CP

Ceiling Plate Installation Guide

The MP-500NPT-CP provides a safe ceiling mounting plate for 1/2"-14 threaded pipes. The ceiling plate can be installed to most horizontal overhead structures, including ceiling trusses, beams, Unistrut and other structural components.

Mounting and/or rigging loudspeakers requires experienced professionals. ***Improperly installed loudspeakers can result in property damage, personal injury, death and/or liability to the installing contractor.***

To assure a trouble free installation, read through and follow these instructions carefully before beginning. If you have doubts about the integrity of the structure you are mounting to or the proper mounting hardware, consult a local structural or hardware specialist.

Note to Installing contractor:

Due to the wide variety of ceiling structures, materials and mounting methods, the installing contractor must exercise good judgment in selecting the proper mounting area and hardware.

Be sure that all of the following items are included in this kit before proceeding:

Qty.	Description
1 pc	Ceiling Plate w/ 1/2"-14NPS threads
1 pc	Set screw, 1/4"-20 x .25" long, black
1 pc	Instruction sheet

Step 1:

Install Ceiling mount to the selected horizontal mounting structure or surface. The structure or mounting surface must be able to support at least 5 times the weight of the speaker and mount (Figure 1).

Step 2:

Loosen the set screw on the ceiling plate before attaching the threaded pipe to the ceiling plate. Pipe should at least go in 1/2" or more into the ceiling plate plate's pipe receiver (Refer to speaker mount installation guide)

Step 3: Attach Speaker Mount

Refer to the selected speaker mount installation guide.

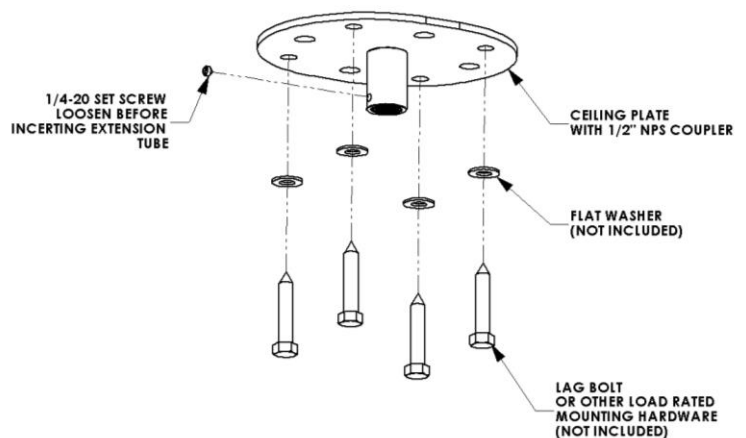


Figure 1